



Description

Electric Contact Pressure Gauges have been developed for different industrial applications where the indication of the system pressure is required and the circuits in process control systems need to be switched in the meantime. Electric Contact Pressure Gauges are mostly used for the pressure measurement of fluids that do not attack Copper Alloys. In corrosive environments, the versions made of AISI 316L are recommended to be used.

Based on the location of the pressure gauge's pointer, the electrical contact switches on or off the control circuits of the system. The electrical contacts, which are adjustable all over the scale range, are mounted on the dial. The limit pointers of the electrical contacts can be adjusted by the adjustment key on the window. As electrical switch contacts, magnetic snap-action contacts and inductive contacts are being used. While snap-action contacts are available for many industrial applications, the inductive ones are suitable for flammable and hazardous environments.

Industrial Applications

Process control, petrochemical plants, mining industry, machine building, pumps/compressors, hydraulic/pneumatic systems, water and waste water treatment systems, HVAC systems, etc.

General Specifications

Conformity:

EN 837-1

Gauge Sizes (mm):

Ø100, Ø160

Measurement Ranges:

0,6 bar ... 1000 bar

Accuracy Class:

Cl.1,0

Working Pressure:

75% of Full Scale

Overpressure Resistance:

1,25x Full Scale (Up to 100bar)

1,15x Full Scale (From 100bar to 600bar)

1,1x Full Scale (Over 600bar)

Ingress Protection Rate:

IP65

Versions:

Standard, Fillable, Silicone Oil Filled

Working Temperature Range:

Ambient: -20°C...60°C

Process: 60°C, 120°C (Silver Brazed), 200°C (AISI 316L)

Process Connections:

G1/2"

Recommended Working Conditions:

Voltage		Ohmic Load		Inductive Load
DC (V)	AC (V)	DC (mA)	AC (mA)	AC (cosφ>0.7 mA)
220	220	100	120	65
110	110	200	240	130
48	48	300	450	200
24	24	400	600	250

Materials:

Bourdon Tube:

Copper Alloy, AISI 316L

Socket:

Brass, AISI 316

Case:

AISI 304, AISI 316L

Cover:

AISI 304, AISI 316L

Movement:

Brass, Stainless Steel

Window:

Polycarbonate

Dial:

Aluminium

Pointer:

Aluminium

Options:

Other Process Connections

Other Pressure Units

Special Dial Design

Dampened Movement (Vib-Lock)

Silver Brazed

Flanged Type

Electrical Contact Types:

NO - NC - NONO - NCNO - NONC - NCNC

Features of Electrical Contact:

Minimum Voltage: 24V

Maximum Voltage: 250V

Minimum Power Capacity: 0.4W~0.4VA

Maximum Power Capacity: 30W~50VA

Maximum Current: 1A (Switch on-Switch off),
0.6A (Continuous)

Алматы (7273)495-231
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Россия +7(495)268-04-70

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (8343)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Казахстан +7(7172)727-132


Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Киргизия +996(312)96-26-47


Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Dimensions (mm)


01-Bottom Connection

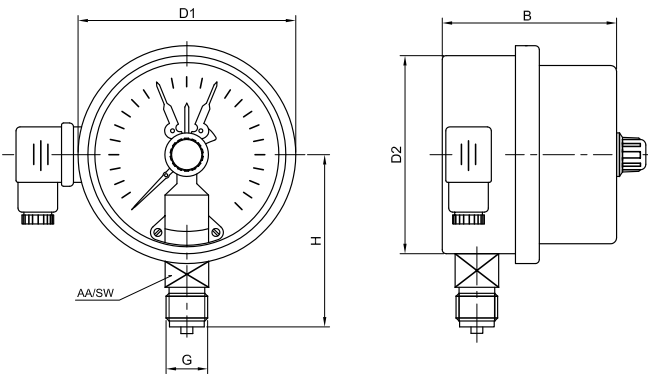

02-Lower Back Connection

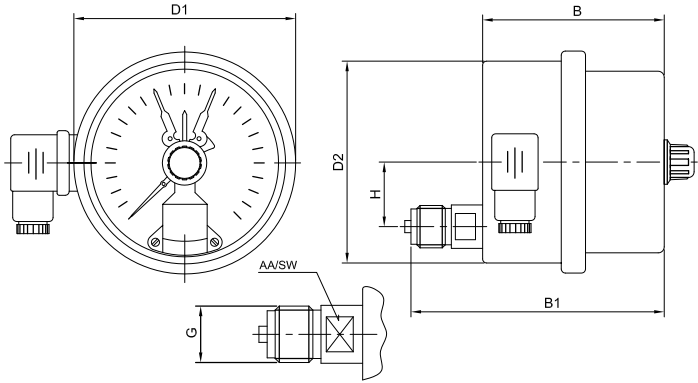


03-Lower Back Panel Mount

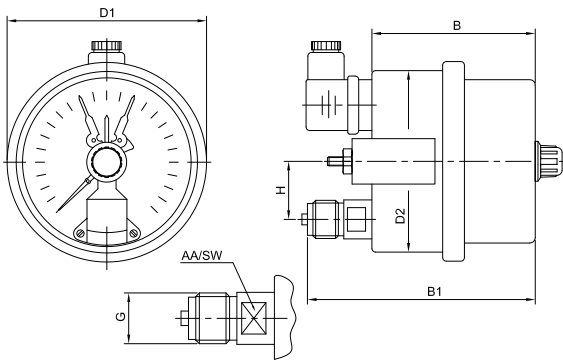


Ø	Connections	Version	Case	Window	Cover	D1	D2	B	B1	H	G	SW
Ø100	Bottom	Standard	Metal	Polycarbonate	Metal	110	100	88	-	87	G1/2"	17
	Lower Back	Standard	Metal	Polycarbonate	Metal	110	100	90	125	32	G1/2"	17
	Lower Back Panel Mount	Standard	Metal	Polycarbonate	Metal	110	100	90	125	32	G1/2"	17
Ø160	Bottom	Standard	Metal	Polycarbonate	Metal	174	160	89	-	89	G1/2"	17
	Lower Back	Standard	Metal	Polycarbonate	Metal	174	160	91	126	91	G1/2"	17
	Lower Back Panel Mount	Standard	Metal	Polycarbonate	Metal	174	160	91	126	91	G1/2"	17

Electrical Circuit Schemes:


NO

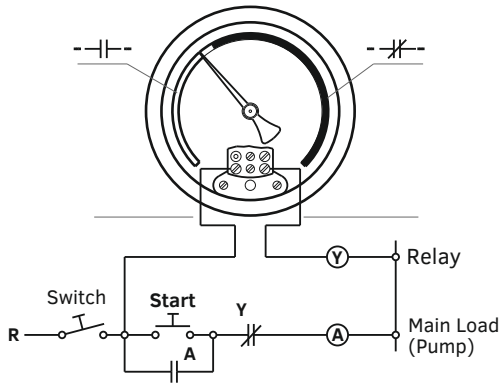


NC

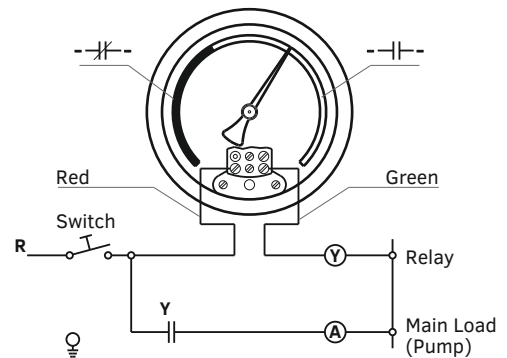


NONO

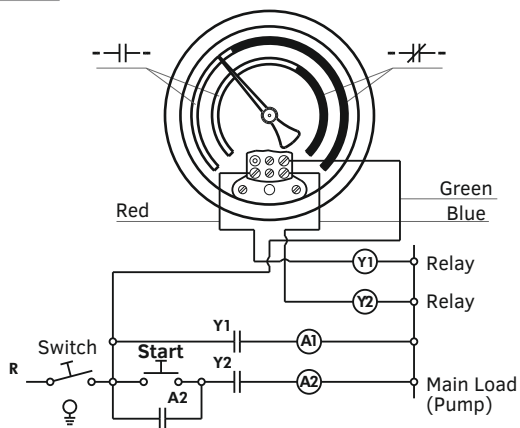


NCNC

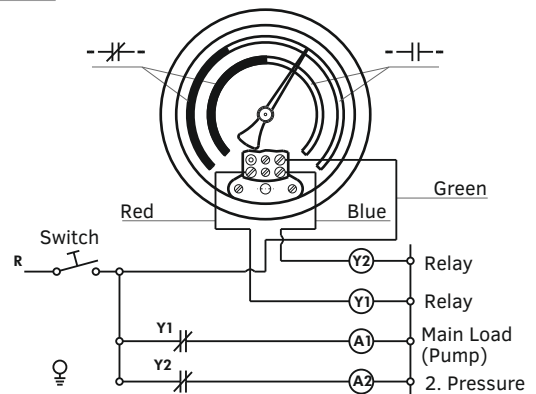


NCNO

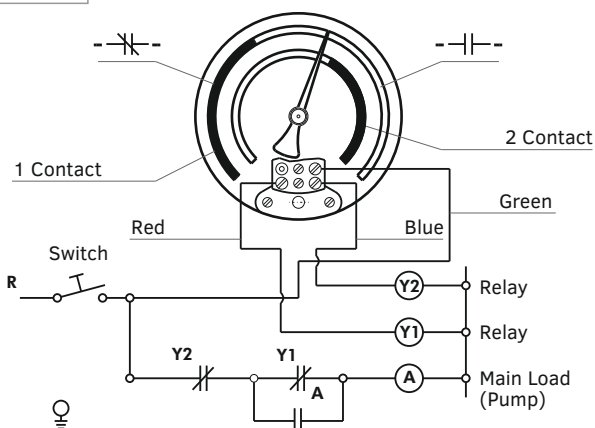

NONC

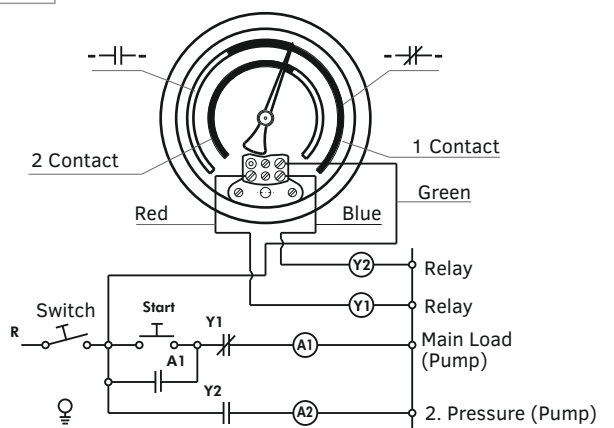

How To Order?

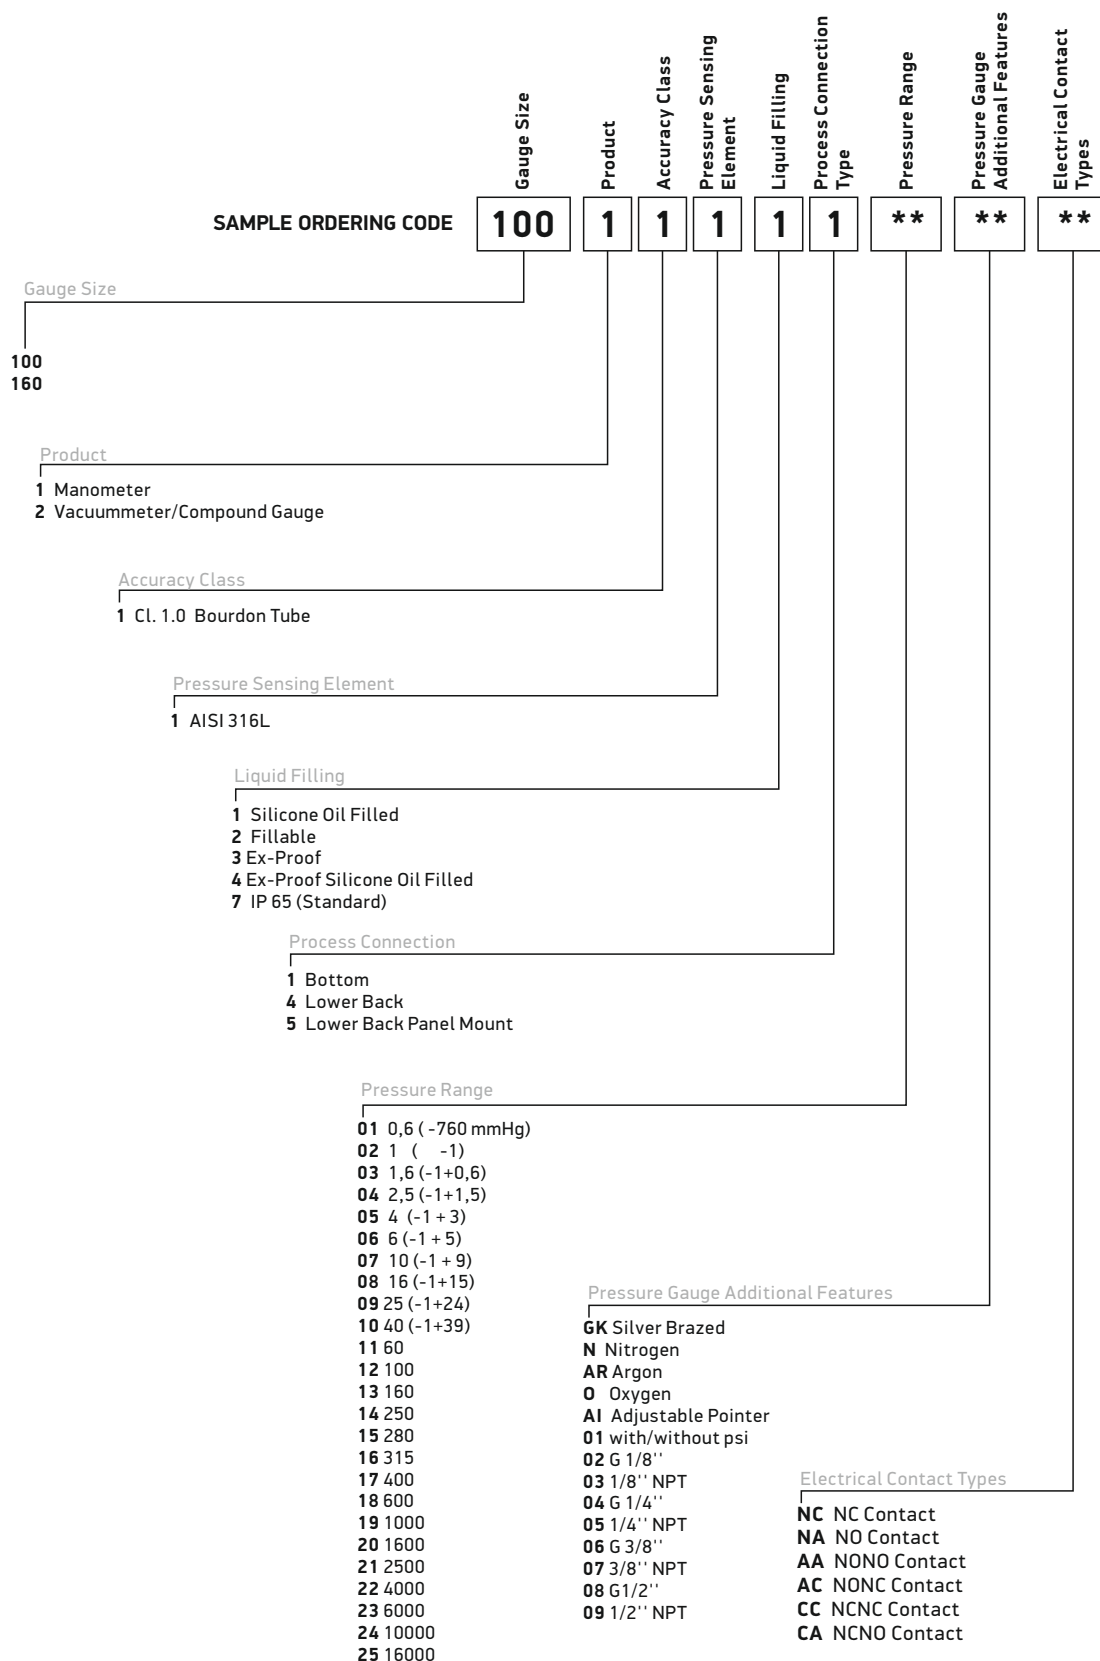

Approvals:



Turkish Standards Institution



ISO 9001 Quality Management System



TURKAK Calibration Laboratory Accreditation Certificate



2014/68/EU Pressure Equipment Directive - Certificate of Conformity



2011/65/EU Restriction of Hazardous Substances Directive - Declaration of Conformity



Gost Certificate



2014/34/EU Equipment and Protective Systems Intended for use in Potentially Explosive Atmospheres - Certificate of Conformity

Алматы (7273)495-231
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Россия +7(495)268-04-70

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Казахстан +7(7172)727-132

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Киргизия +996(312)96-26-47

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

<https://pakkens.nt-rt.ru/> || psi@nt-rt.ru